

VENUS 72 V 4W

Foglio 1 di 4

TIPO APPARECCHIO

LUCI LED DI CORTESIA



CARATTERISTICHE GENERALI

| MATERIALI

Grado di protezione	IP66	CORNICE	ACCIAIO INOX AISI 316
Applicazione	PARETE	DIFFUSORE	POLICARBONATO
Dimensioni	Ø 72 mm	DISSIPATORE	ALLUMINIO
Recesso	20.5 mm	FINITURA CORNICE	LUCIDATO / SATINATO / BIANCO 9010 / ORO PVD / NERO PVD
Foratura	Ø 54 mm		
Peso	110 gr		
Fissaggio	VITI		
Orientabile	No		
Flessibile	No		
Interruttore	No		

SPECIFICHE ELETTRICHE

TIPO ALIMENTAZIONE

Tensione Costante

Sorgente Luminosa	2 LED ALTA LUMINOSITA'		
Tipo Apparecchio	Bicolore		
Alimentazione	9 -32 Vdc		
Potenza	4 W		
Assorbimento	0,33A@12V / 1,7A@24V		
Dimmerabile / Dimmer Consigliato	Si / FASP094CA2A3D00 HDIM300 D00	Modalità dimmerazione	PWM

DATI ILLUMINTECNICI

Temperatura colore

	BIANCO CALDO (2900-3100 °K)	BIANCO NATURALE (3800-4100 °K)	BIANCO FREDDO (5500-6500 °K)
CRI	90	80	
Flusso luminoso	115 lm	125 lm	
Efficienza	29 lm/W	31 lm/W	
Ø a 1 m			
Ø a 2 m			
Ø a 3 m			
Colori luce disponibili			
 BIANCO CALDO  BIANCO-ROSSO			
 BIANCO NATURALE			
 BIANCO-BLU			

CERTIFICAZIONI



RoHS

TIPO APPARECCHIO

LUCI LED DI CORTESIA


SPECIFICHE PER IL COLLEGAMENTO DEL SINGOLO APPARECCHIO

Dimensioni in mm (inches)

POTENZA: 4 W

ALIMENTAZIONE: 9 -32 Vdc

ASSORBIMENTO: 0,33A@12V / 1,7A@24V

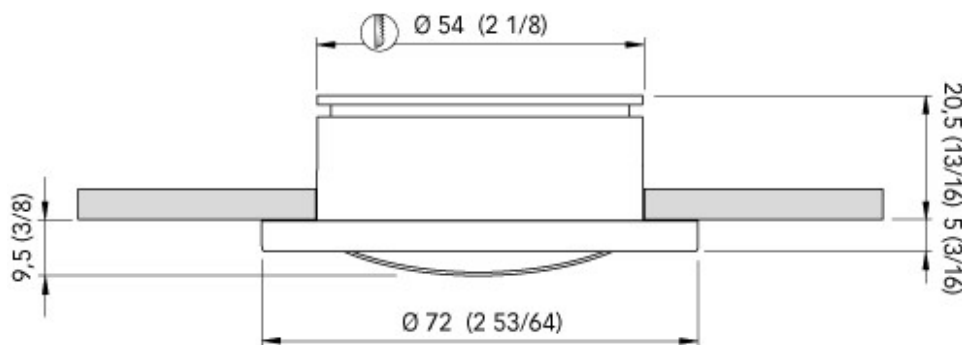

INDICAZIONI PER IL COLLEGAMENTO


AVVERTENZE

Utilizzare l'apparecchio in bassissima tensione (SELV) con alimentatore LED in **TENSIONE COSTANTE**.


Non collegare l'apparecchio direttamente alla corrente di rete (AC).

INDICAZIONI GENERALI PER COLLEGARE PIU' DI UN APPARECCHIO

Questo prodotto si può collegare in parallelo con alimentatore LED in **TENSIONE COSTANTE**.

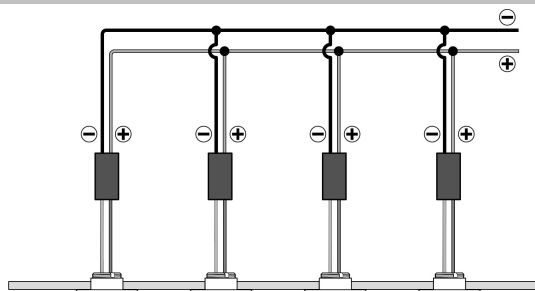

INDICAZIONI PER IL MONTAGGIO

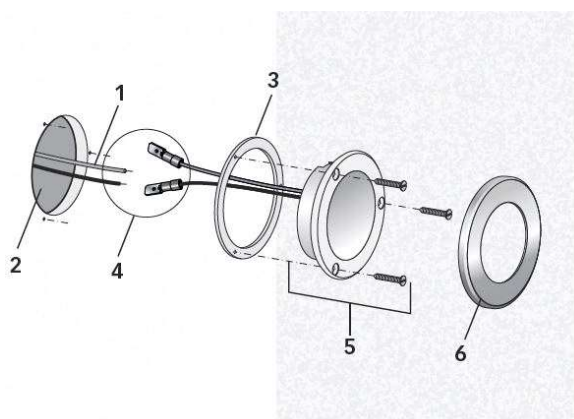

1. Nel pannello o muro al quale applicare il punto luce devono essere presenti i cavi provenienti dall'alimentatore che fornisca una tensione costante come da tabella.

2. Praticare il foro per il prodotto acquistato nella misura indicata in tabella nel punto dove si vuole applicare.

3. Inserire la guarnizione prima di effettuare il collegamento.

4. Il faretto è dotato di connettori faston maschio ai cavi. Per le applicazioni che non lo richiedono tagliare i cavi per eliminare i faston.

Collegamento: il positivo dall'alimentazione con il cavo rosso del prodotto, il negativo con il cavo nero; testare il funzionamento del prodotto.

5. Fissare il faretto al pannello utilizzando le viti autofilettanti.

6. Applicare a pressione la cornice sul faretto

VENUS 72 V 4W

Pag. 3 of 4

CATEGORY

COURTESY LIGHT



GENERAL FEATURES

IP Protection grade	IP66
Installation on	WALL
Dimensions	Ø 72 mm
Recess	20.5 mm
Mounting hole	Ø 54 mm
Weight	110 gr
Fixing system	SCREWS
Orientable	No
Flexible	No
Switch	No

MATERIALS

BEZEL	AISI 316 STAINLESS STEEL
DIFFUSER	POLYCARBONATE
HEAT SINK	ALUMINIUM
BEZEL FINISHING	POLISHED / SATIN / WHITE 9010 / GOLD PVD / BLACK PVD

ELECTRICAL SPECIFICATIONS

TYPE OF POWER	Constant Voltage		
Light source	2 HIGH LUMINOSITY LED		
Light Type	Bicolor		
Power supply	9 -32 Vdc		
Power consumption	4 W		
Absorption	0,33A@12V / 1,7A@24V		
Dimmable / Recommended dimmer	Yes / FASP094CA2A3D00 HDIM300 D00	Dimmer mode	PWM

PHOTOMETRIC DATA

Color Temperature

	WARM WHITE (2900-3100 °K)	DAY LIGHT (3800-4100 °K)	COOL WHITE (5500-6500 °K)
CRI	90	80	
Luminous flux	115 lm	125 lm	
Luminous efficacy	29 lm/W	31 lm/W	
Ø at 1 m			
Ø at 2 m			
Ø at 3 m			
Available light colours  WW  WHITE-RED  DL  WHITE-BLUE			

CERTIFICATIONS



RoHS

CATEGORY

COURTESY LIGHT


SPECIFICATION FOR THE CONNECTION OF INDIVIDUAL UNIT

Dimensions - mm (inches)

POWER: 4 W

POWER SUPPLY: 9 -32 Vdc

OPERATING VOLTAGE

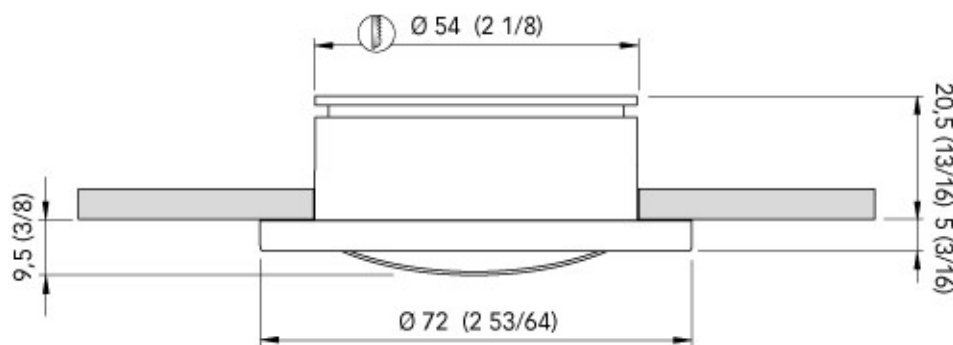

CONNECTION INFORMATION


WARNINGS

Use the unit in ultra-low voltage (SELV) with a LED power supply with **CONSTANT VOLTAGE OUTPUT**.


Do not plug the unit directly into the wall socket (AC).

GENERAL INFORMATION TO CONNECT MORE THAN ONE DEVICE

This product can be connected in parallel with LED power supply with **CONSTANT VOLTAGE OUTPUT**.

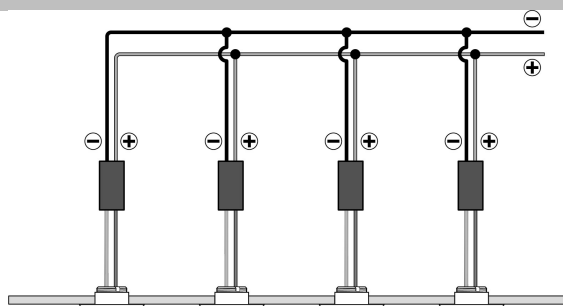

INSTRUCTIONS FOR ASSEMBLY

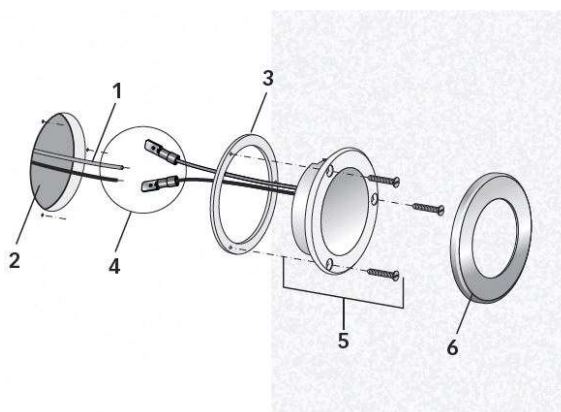

1. The wires coming from the power supply (at the voltage provided for by the chart) must be present in the panel where the light will be installed.
2. Make the hole for the corresponding product, according to the size recommended in the scheme.
3. Insert the gasket before connecting.
4. The spot light is equipped with fast-on male connectors on the wires. Cut the wires to remove the fast-on connectors when the application does not require them.
- Connection: the positive is the red wire, the negative is the black wire; test the product's functioning.
5. Secure the spot light to the panel using self-tapping screws.
6. Install the frame on the spot light by applying pressure.