

- SDR (Software Defined Radio) technology
- Voice digitalized
- Large 7-inch color display
- Knob & touch screen operation
- MSI RX and ACS functions
- Data interface to BAM/INS
- Marine communication handset
- Type approval with DNV (MED) and CCS



TRANSCIVER



ANTENNA COUPLER



ALARM UNIT



CONTROL UNIT

- NHR-1500 MF/HF RADIO (GMDSS) is a high-performance MF/HF device, capable of voice communication and DSC (digital selective calling) facilities as well.
- Conforming to the Class A standard set for MF/HF DSC by ITU and IMO regulations, NHR-1500 can be part of an onboard GMDSS package for vessels of A2/A3/A4.
- NHR-1500 conforms to the regulations of ITU-R M.493-16, ITU-R M.541-11, IMO MSC.302 (87), MSC.512 (105), IEC 61097-9, etc.



SPECIFICATIONS

- TX Frequency: 1605.0 ~ 27500.00 kHz
- RX Frequency: 300.0 ~ 29999.99 kHz
- Working Channel: 400+ channels
- Communication Mode: Simplex/Semi-duplex
- Emission Class: J3E, H3E, A1A, F1B
- TX Power: 150 W pep
- RX Sensitivity: $\leq 2.5 \mu\text{V}$ (1605.0~27500.0 kHz, J3E), $\leq 0.7 \mu\text{V}$ (1605.0~27500.0 kHz, F1B)
- DSC Frequencies (distress): 2187.5, 4207.5, 6312.0, 8414.5, 12577.0, 16804.5 (kHz)
- Control Display: 7-inch color display, touch screen
- Interface: BAM/INS/GNSS (RS422)
- Antenna Impedance: 50 Ω
- Power Supply: DC 24 V (range 18 V ~ 29 V)
- Operating Temperature: -15° ~ 55°C (indoor parts)
-25° ~ 55°C (outdoor parts)
- IP Grade: IP22: Control Unit, Transceiver, Handset.
RF Junction Box; IP66: Antenna Coupler

EQUIPMENT LIST


● STANDARD

- Transceiver	NHR-1500T	1 pc
- Control Unit	NHR-1000C	1 pc
- Antenna Coupler	NHR-1000A	1 pc
- Handset	NHS-200	1 pc
- RF Junction Box	NHR-200J	1 pc
- Cable & Accessories		1 set

● OPTIONS


- Printer	NPT-100	1 pc
- Alarm Unit	NAU-100	1 pc
- External Speaker	NSK-100	1 pc
- TX/RX Antenna	NHA100	1 pc
- DSC RX Antenna	NHA200	1 pc
- AC/DC PSU	NPS-300	1 pc

SYSTEM DIAGRAM

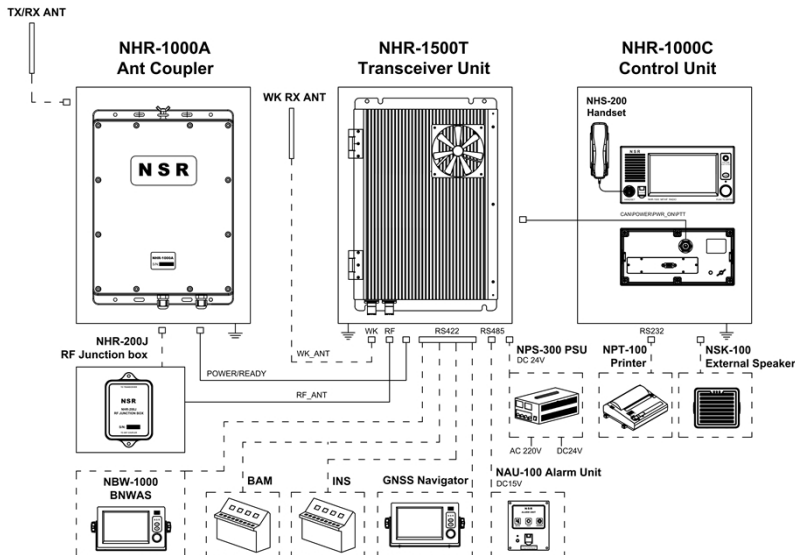


SIZE DIMENSION


TRANSCIVER

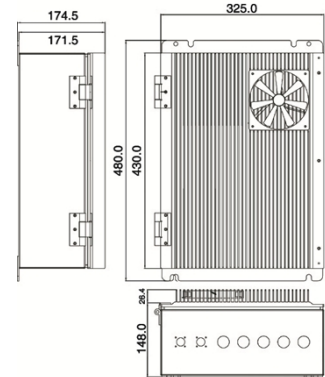

CONTROL UNIT

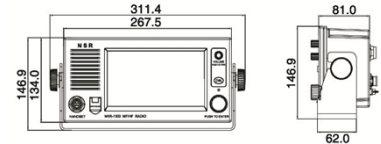

HANDSET



ANTENNA COUPLER

