


SENSOR DE NIVEL DE COMBUSTIBLE

Ref: 2716005

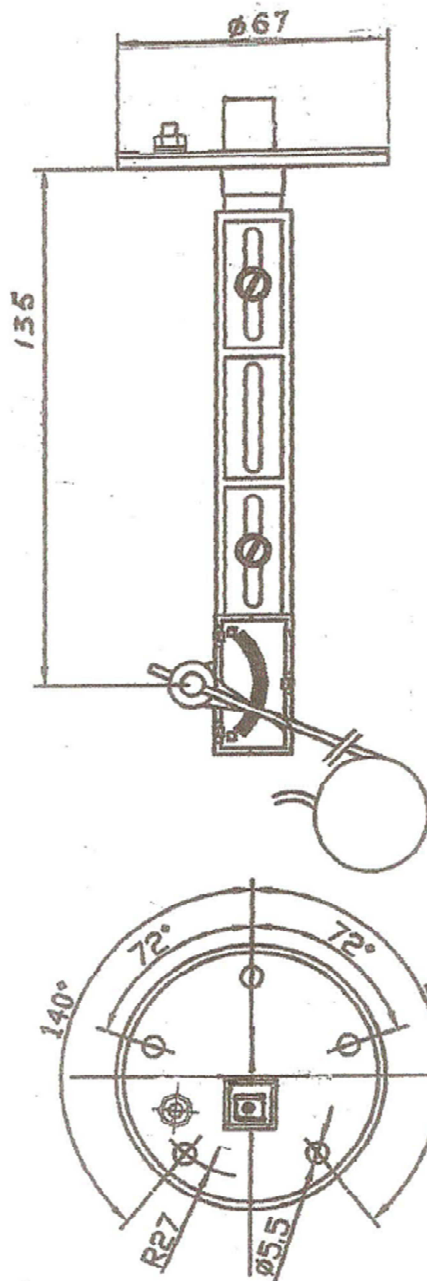

TECHNICAL CHARACTERISTICS

- Adjustable sender from 20 to 60cm.
- Ceramic resistor with contact Sn-Ag
- Contact cursor Cd-Ag.
- Complete body in acetal with glass fibre and stainless.
- Watertight joint resistant to hydrocarbons.
- Connection by terminal faston 6,35mm.
- Rod of 2mm Stainless.
- Tinned plug wire with Teflon protection .
- Float of polyethylene of low density.
- System of clutch allows to eliminate the vibrations of the gauge in route or when the ship is stopped.

Regulation	
Position	Resistance (Ohms)
0	240
1/2	
1	35