

# Boat



**NEW & improved collection 2024**



New super dull embossing



Waterproof



Lightweight



UV resistant



Anti-bacterial


**5**

years warranty

**D2360 // D7460 // D9420 // Eurocore 55**

## Eurocore 55 (W50509001)

Multi-use + 80% wind reduction // Vielseitig einsetzbar + 80% Windreduzierung // Multi-usage + 80% de réduction du vent // Multiuso + 80% de reducción de viento // Veelzijdig + 80% windreductie

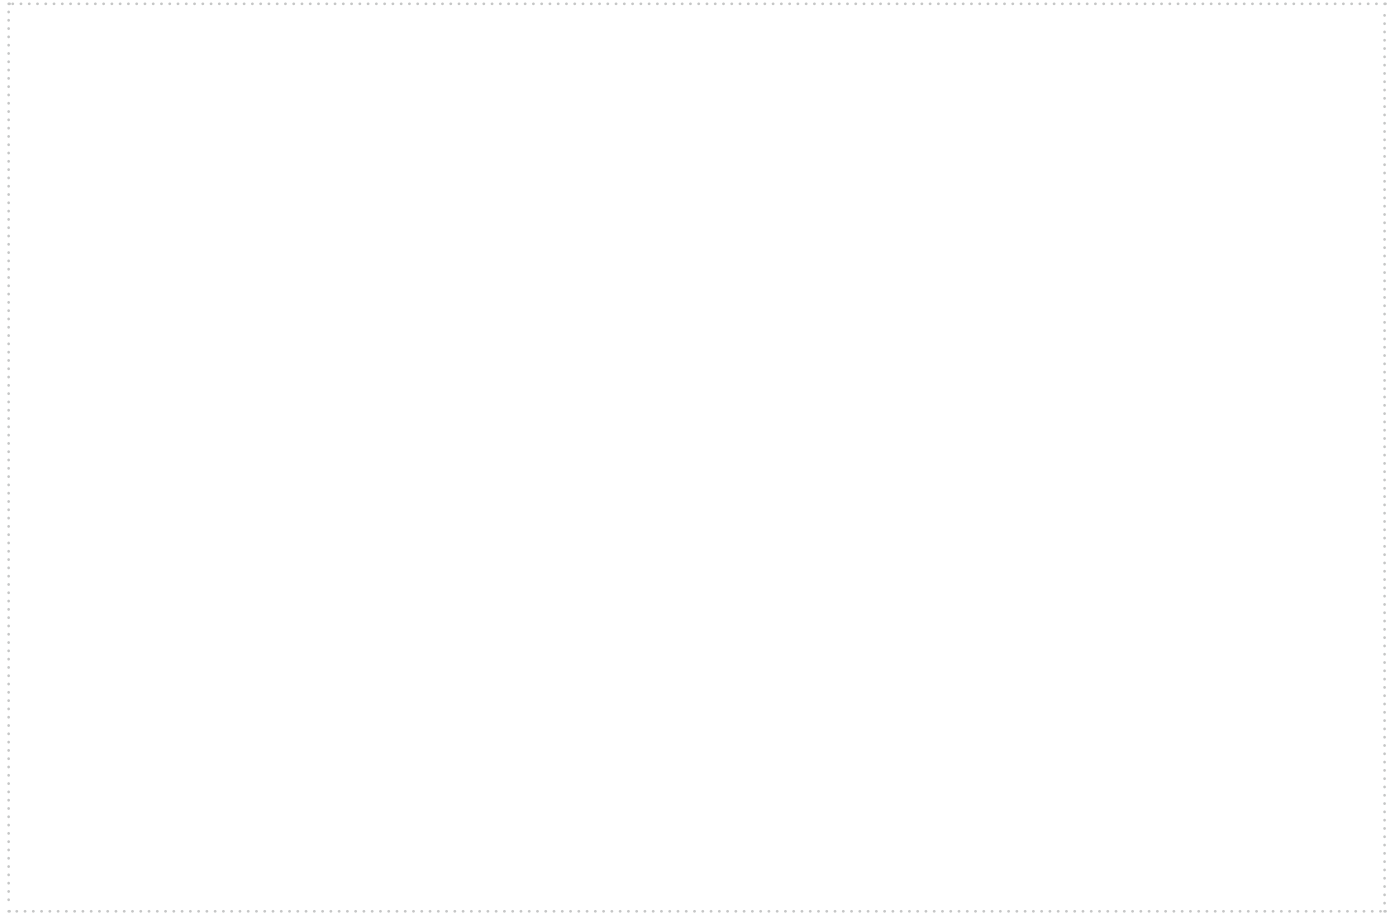

**1399**

↔ 210cm, 320cm



**3130**

↔ 210cm, 320cm



**5601**

↔ 210cm



**5603**

↔ 210cm, 320cm,  
370cm



**6601**

↔ 320cm




**6602**

↔ 210cm, 320cm,  
370cm




**7601**

↔ 210cm, 320cm,  
370cm



**7999**

↔ 210cm, 320cm,  
370cm



**9917**

↔ 210cm, 320cm,  
370cm

## D2360

Lightweight // Leichtgewicht // Léger // Ligero  
Lichtgewicht



**5335**      **7002**      **7185**  
↔ 218 cm    ↕ 50m    ↔ 218 cm    ↕ 50m    ↔ 218 cm    ↕ 50m



**8600**      **9002**  
↔ 218 cm    ↕ 50m    ↔ 218 cm    ↕ 50m

## D7460

Highly robust // Äußerst robust // Grande robustesse //  
Muy resistente // Uiterst robuust



**5335**      **7002**      **9002**  
↔ 218 cm    ↕ 50m    ↔ 218 cm    ↕ 50m    ↔ 218 cm    ↕ 50m

# D9420

Low wick




## On request

Auf Anfrage // Sur demande  
// Bajo pedido // Op verzoek


## Clean & Care

Reinigung & Pflege // Nettoyage et entretien //  
Limpieza y cuidado // Reiniging en onderhoud




### Air periodically

Regelmäßig lüften // Aérer périodiquement //  
Ventilar periódicamente // Regelmatig ventileren



### Clean regularly using a soft cloth (using only water-based neutral cleaners)

Regelmäßig mit einem weichen Tuch reinigen (nur  
neutrale Reinigungsmittel auf Wasserbasis verwenden)  
// Nettoyer régulièrement à l'aide d'un chiffon doux (en  
utilisant uniquement des nettoyeurs neutres à base d'eau)  
// Limpiar regularmente con un paño suave (utilizando sólo  
limpiadores neutros a base de agua) // Maak regelmatig  
schoon met een zachte doek (gebruik alleen neutrale  
reinigingsmiddelen op waterbasis)




### Only store when fully dried

Nur vollständig getrocknet lagern // Ne stocker qu'après  
séchage complet // Almacenar sólo seco // Alleen opbergen  
als het volledig gedroogd is



### Do not use high-pressure cleaners

Keine Hochdruckreiniger verwenden // Ne pas utiliser de  
nettoyeurs à haute pression // No utilizar limpiadores de alta  
presión // Geen hogedrukreinigers gebruiken



### Don't stack multiple covers

Abdeckungen nicht stapeln // Ne pas empiler les  
couvertures // No apilar cubiertas // Dekzeilen niet stapelen

# Advantages

Vorteile // Avantages // Ventajas // Voordelen



## New super dull embossing

Neue Super-Matt-Prägung  
Nouveau gaufrage super mat  
Nuevo gofrado super mate  
Nieuwe supermatte kalender



## UV resistant

UV-beständig  
Résistant aus UV  
Resistente a los UV  
UV-bestendig



## Waterproof

Wasserdicht  
Imperméable à l'eau  
Impermeable  
Waterdicht



## Anti-bacterial

Antibakteriell  
Antibactérien  
Antibacteriano  
Antibacterieel



## Lightweight

Leichtgewicht  
Poids-léger  
Ligero  
Lichtgewicht



## Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

	<b>D2360</b> Lightweight	<b>D7460</b> Highly robust	<b>D9420</b> Low wick	<b>Eurocore 55</b> <b>(W50509001)</b> Multi-use + 80% wind reduction
<b>Total Weight</b> - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht	<b>360 g/m<sup>2</sup></b>	<b>460 g/m<sup>2</sup></b>	<b>420 g/m<sup>2</sup></b>	<b>250 g/m<sup>2</sup></b>
<b>Composition</b> Zusammensetzung // Composition // Composición // Samenstelling	PES + PVC			
<b>Coating</b> Beschichtung // Enduction // Recubrimiento // Coating	2-sided	1-sided	1-sided	2-sided
<b>Fabric (Warp / Weft)</b> DIN ISO 2060:1994 Gewebe // Tissu // Tejido // Weefsel	PES, 280 dtex PES, 280 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex
<b>Lacquering</b> Lackierung // Laquage // Tipo lacado // Lacquering	Top: glossy Bottom: glossy	Top: dull	Top: dull	-
<b>Breaking Strength (Warp / Weft)</b> ISO 1421/1:2016 Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte	<b>1300 N/5cm</b> <b>1300 N/5cm</b>	<b>2500 N/5cm</b> <b>1800 N/5cm</b>	<b>3000 N/5cm</b> <b>2800 N/5cm</b>	<b>≥ 1600 N/5cm</b> <b>≥ 1600 N/5cm</b>
<b>Tensile Strength Elongation (Warp / Weft)</b> NBN EN ISO 1421_2017 Reissdehnung // Allongement sous charge determine // Resistencia a la traccion alargamiento de deformacion // Breukverlenging	-	-	-	≥ 18 % ≥ 18 %
<b>Tear Strength (Warp / Weft)</b> Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand	(DIN EN ISO 4674/1A:2017) <b>70 N</b> <b>60 N</b>	(DIN 53363:2003) <b>250 N</b> <b>250 N</b>	(DIN 53363:2003) <b>300 N</b> <b>300 N</b>	<b>≥ 400 N</b> <b>≥ 400 N</b>
<b>Adhesion</b> - ISO 2411:2017 Haftung // Adhérence // Adhesión // Hechting	60 N/5cm	80 N/5cm	80 N/5cm	-
<b>Temperature resistance</b> - EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid	-40/+70 °C	-40/+70 °C	-40/+70 °C	-30/+70 °C
<b>Light Fastness</b> - ISO 105 B02:2014 Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheit	7-8	7-8	7-8	6-8
<b>Fire Behaviour</b> - ISO 3795:1989 Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag	< 100 mm/min	< 100 mm/min	< 100 mm/min	-



Registration,  
Evaluation,  
Authorization  
and restriction  
of Chemicals



Recyclable fabric  
Recyclable Textilien  
Textiles recyclables  
Productos reciclables  
Recycleerbaar textiel



Slitting (width) on request  
Schneiden (Breite) auf Anfrage  
Tronçonnage (largeur) sur demande  
Cortar (ancho) bajo pedido  
Snijden (breedte) op aanvraag



Sustainable options available  
Nachhaltige Optionen verfügbar  
Options durables disponibles  
Opciones sostenibles disponibles  
Duurzame opties beschikbaar